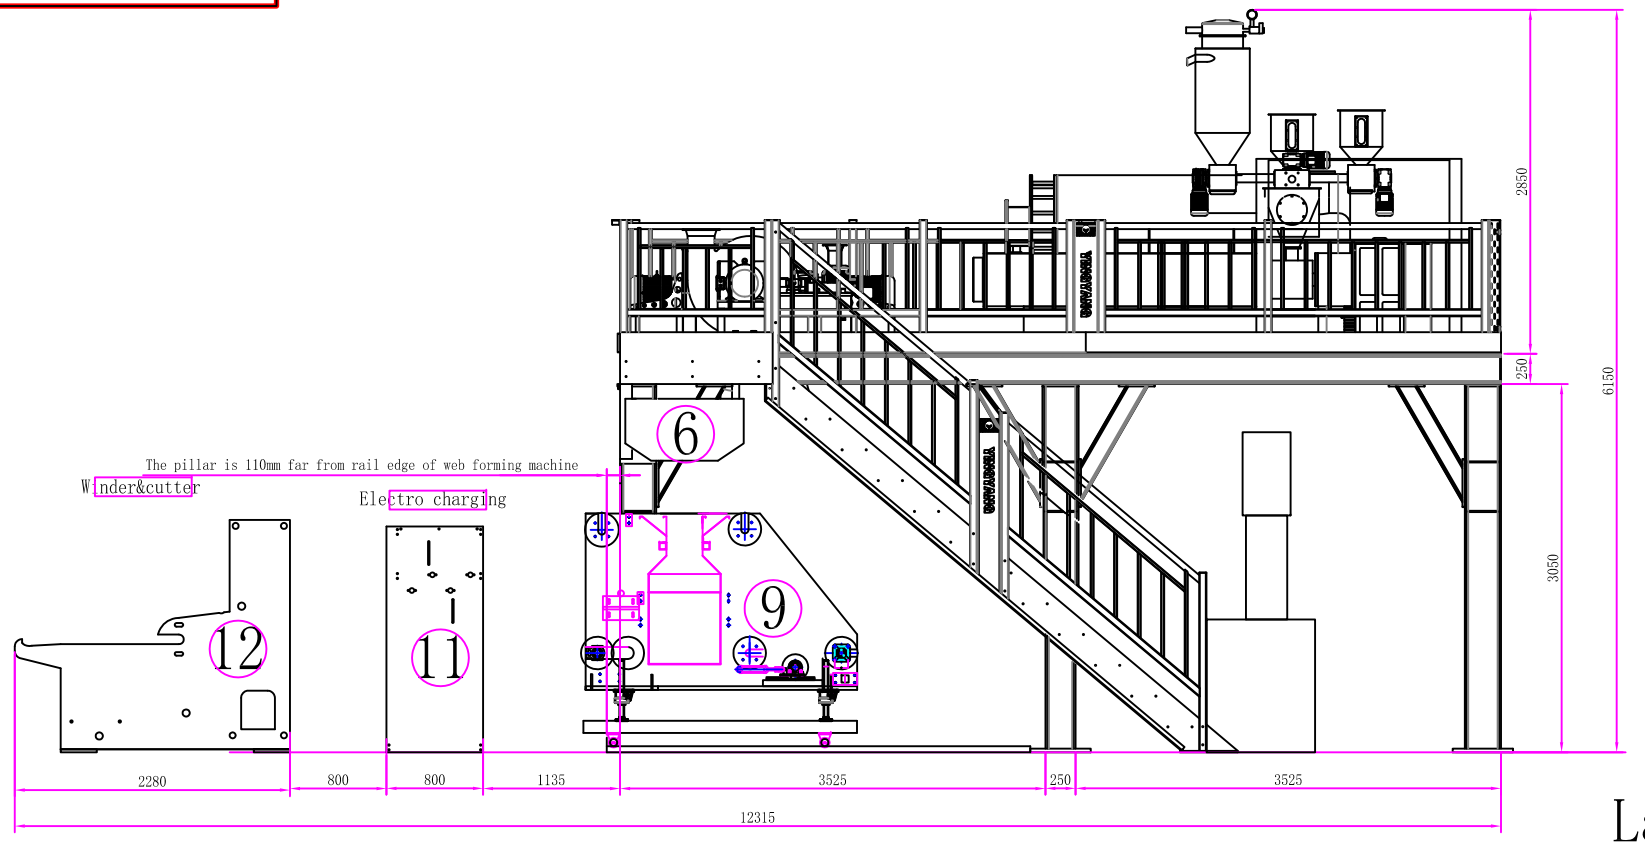

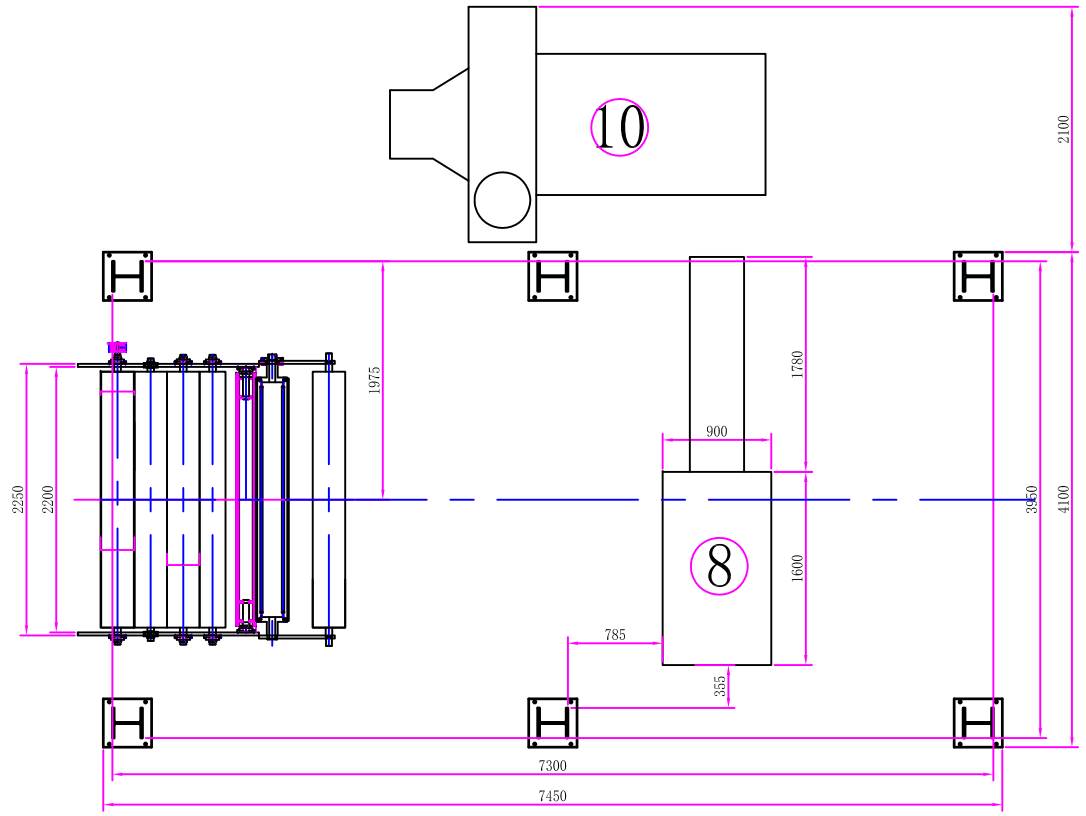

Layout for the machines on ground floor

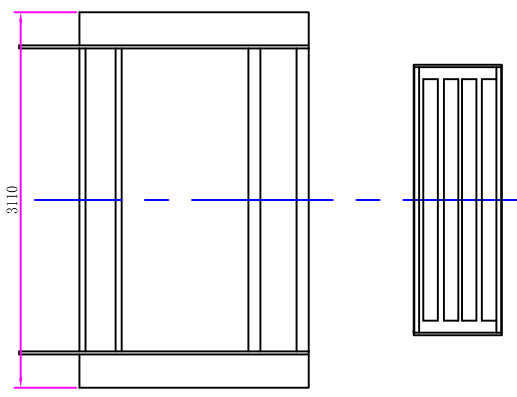

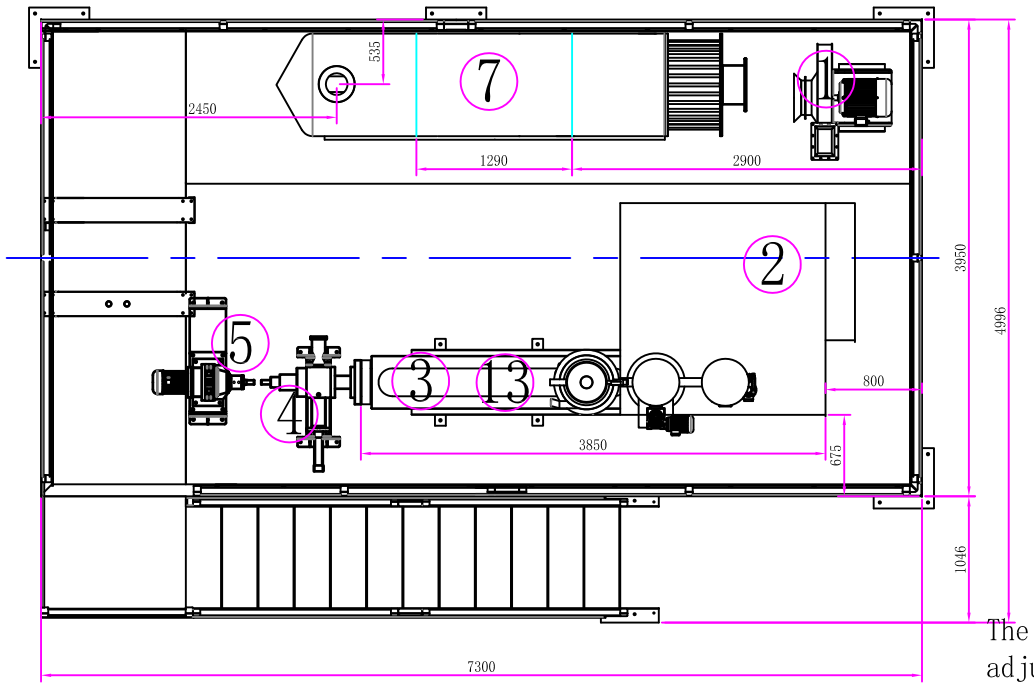

Installed power for whole line:approx 590KW (including heating power339KW)

NO.	Name	Power	Qty	Remark
13	Melt pipe heating &insulation	16KW	1	
12	YY-160 Winder &cutter	6KW	1	
11	Electro charging M/C	0.5KW		
10	YY-160 Suction fan	90KW	1	
09	YY-160 Web forming machine	8.5KW	1	
08	YY-160 High pressure fan	90KW	1	
07	YY-160 Air heater	240KW	1	
06	YY-160 Melt die head heating	30KW	1	
05	YY-160 Melt metering pump	3KW	1	
04	YY-160 Melt filter	3KW	1	
03	YY-160 Screw heating	52KW	1	
02	YY-160 Screw extruder	Driving 45KW	1	
01	YY-160 Material feeder	6.6KW	1	

The actual installation size can be adjusted according to site.

标记	更改内容或依据	更改人	日期

设 计			计 划	20/0516CK	YingyangNonwoven Machinery
制 图	唐 璐		数 量		
校 对			重 量		YYL-160Melt Blown Production Line
会 签			比 例		
标准化			共（ ）张第（ ）张		
审 核			Provisional Layout		Date：20.06.09
批 准					

借（通）用件代号	
旧底图总号	
底图总号	
日期	签字